


PRODUCT SPECIFICATION

FLO-CELL[®] 50MM

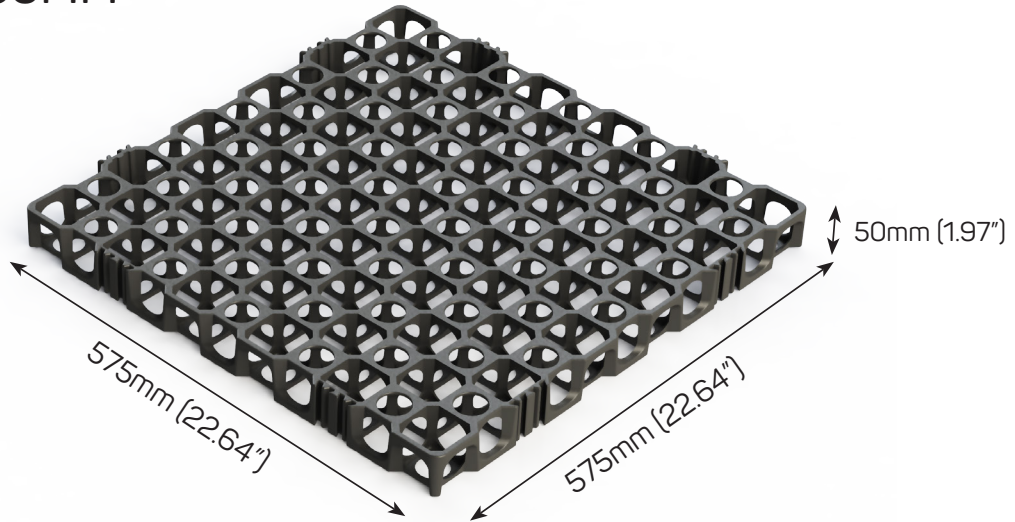

| | |
|----------------------------------|---|
| Part Number | 80050 |
| Part Size | (H) 50mm (W) 575mm (L) 575mm (H) 1.97" (W) 22.64" (L) 22.64" |
| Part Weight | 1650 grams |
| Weight Per Square Metre | 4.95 kg |
| Ultimate Strength (RECYCLED PP) | 140 tonnes/SQM |
| Ultimate Strength (VIRGIN PP) | TBA |
| Flow Rate | 2.56 Litres/Sec/m @ 1% gradient |
| Pieces Per Square Metre | 3 |
| Volume Void | 90% |
| Surface Void | 70% |
| Material | 85% Recycled Polypropylene 15% Propriety Selected Materials |
| Colour | Black |
| Chemical & Biological Resistance | Unaffected by molds, algae, soil-bourne chemicals, bacteria and bitumen. |
| Service Temperature | -10 ⁰ C - 70 ⁰ C (14 F ⁰ - 158 F ⁰) |
| Approximate Material Lifespan | 100 years + with no ultra violet exposure |

*Ultimate strength till failure (not yield)

Note: Atlantis[®] product specifications are updated on a regular basis. Please contact Atlantis[®] technical department for the latest data sheet available