


## Flo-Tank® module specifications

**Maximum Flow Rate @ 1% gradient 11.5 L/s** (3.038 USGal/s)  
**Maximum Flow Rate @ 5% gradient 27.4 L/s** (7.238 USGal/s)  
**Maximum Flow Rate @ 10% gradient 39 L/s** (10.303 USGal/s)

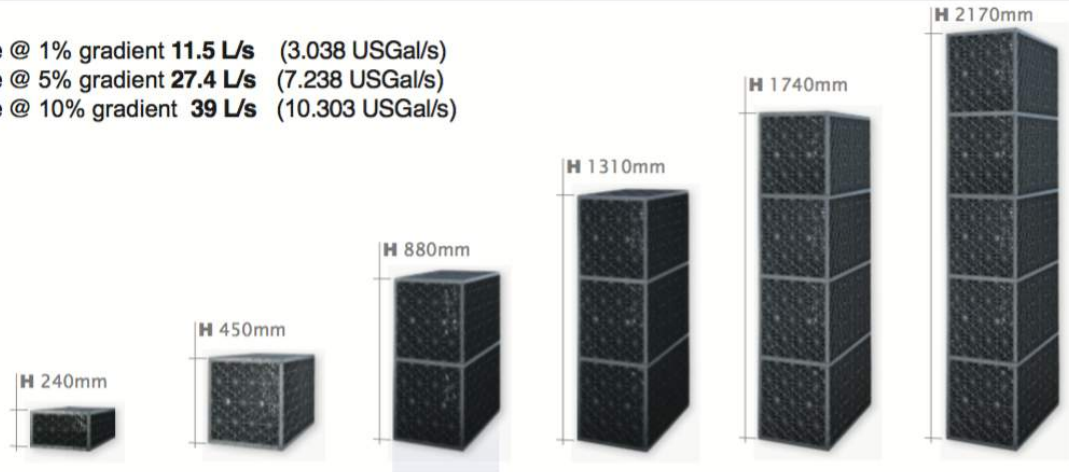


|                            | MINI  | SINGLE                                      | DOUBLE                                      | TRIPLE                                       | QUAD   | PENTA  |
|----------------------------|---|---|---|--|--|--|
| <b>Part Number</b>         | 70010                                       | 70003                                       | 70004                                       | 70005  | 70006  | 70007  |
| <b>Height</b>              | 240mm (9.45")                               | 450mm (17.72")                              | 880mm (34.65")                              | 1310mm (51.57")                              | 1740mm (68.5")                               | 2170mm (85.43")                              |
| <b>Width</b>               | 408mm (16.06")                              | 408mm (16.06")                              | 408mm (16.06")                              | 408mm (16.06")                               | 408mm (16.06")                               | 408mm (16.06")                               |
| <b>Length</b>              | 685mm (26.97")                              | 685mm (26.97")                              | 685mm (26.97")                              | 685mm (26.97")                               | 685mm (26.97")                               | 685mm (26.97")                               |
| <b>Weight</b>              | 4kg (8.8lbs)                                | 6.5kg (14.3lbs)                             | 12.0kg (26.5lbs)                            | 17.5kg (38.6lbs)                             | 23.0kg (50.7lbs)                             | 28.5kg (62.8lbs)                             |
| <b>Module Footprint</b>    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     |
| <b>Gross Volume</b>        | 0.067m <sup>3</sup> (2.366ft <sup>3</sup> ) | 0.126m <sup>3</sup> (4.450ft <sup>3</sup> ) | 0.246m <sup>3</sup> (8.687ft <sup>3</sup> ) | 0.366m <sup>3</sup> (12.925ft <sup>3</sup> ) | 0.486m <sup>3</sup> (17.163ft <sup>3</sup> ) | 0.607m <sup>3</sup> (21.436ft <sup>3</sup> ) |
| <b>Net Volume m3 (ft3)</b> | 0.064 (2.250)                               | 0.119 (4.219)                               | 0.234 (8.251)                               | 0.348 (12.283)                               | 0.462 (16.315)                               | 0.576 (20.346)                               |
| <b>Net Volume L (gal.)</b> | 63.72 (16.83)                               | 119.47 (31.56)                              | 233.65 (61.72)                              | 347.81 (91.88)                               | 461.98 (122.04)                              | 576.15 (152.20)                              |


## Flo-Channel® module specifications

**HIGH FLOW RATE**

**Maximum Flow Rate @ 1% gradient 28.5 L/s** (7.5 USGal/s)  
**Maximum Flow Rate @ 5% gradient 89.7 L/s** (23.7 USGal/s)  
**Maximum Flow Rate @ 10% gradient 148 L/s** (39 USGal/s)



The module opening has a diameter of 253mm (9.84")

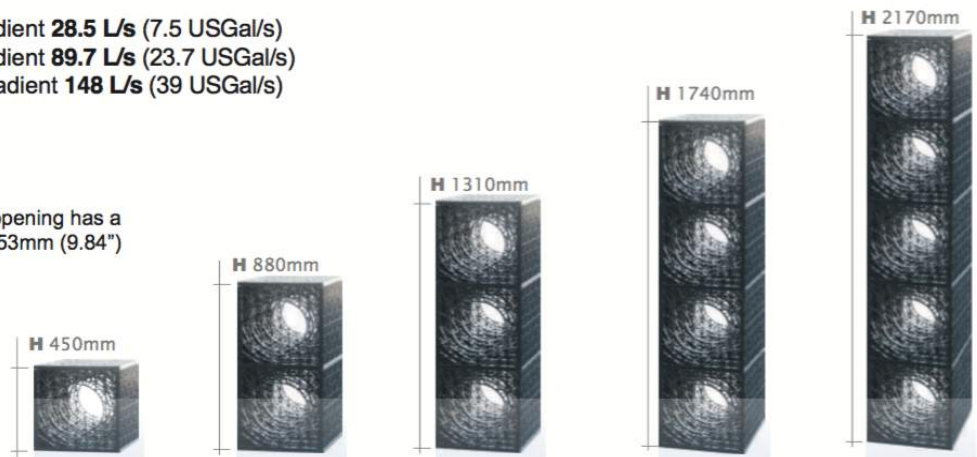

|                             | SINGLE                                      | DOUBLE                                      | TRIPLE                                       | QUAD   | PENTA  |
|-----------------------------|---|---|--|--|--|
| <b>Part Number</b>          | 70003FC                                     | 70004FC                                     | 70005FC                                      | 70006FC                                      | 70007FC                                      |
| <b>Height</b>               | 450mm (17.72")                              | 880mm (34.65")                              | 1310mm (51.57")                              | 1740mm (68.5")                               | 2170mm (85.43")                              |
| <b>Width</b>                | 408mm (16.06")                              | 408mm (16.06")                              | 408mm (16.06")                               | 408mm (16.06")                               | 408mm (16.06")                               |
| <b>Length</b>               | 685mm (26.97")                              | 685mm (26.97")                              | 685mm (26.97")                               | 685mm (26.97")                               | 685mm (26.97")                               |
| <b>Module Footprint</b>     | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )    | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     | 0.2795m <sup>2</sup> (3ft <sup>2</sup> )     |
| <b>Gross Volume</b>         | 0.126m <sup>3</sup> (4.450ft <sup>3</sup> ) | 0.246m <sup>3</sup> (8.687ft <sup>3</sup> ) | 0.366m <sup>3</sup> (12.925ft <sup>3</sup> ) | 0.486m <sup>3</sup> (17.163ft <sup>3</sup> ) | 0.607m <sup>3</sup> (21.436ft <sup>3</sup> ) |
| <b>Net Volume (litres)</b>  | 0.119 (4.219)                               | 0.234 (8.251)                               | 0.348 (12.283)                               | 0.462 (16.315)                               | 0.576 (20.346)                               |
| <b>Net Volume (Gallons)</b> | 119.47 (31.56)                              | 233.65 (61.72)                              | 347.81 (91.88)                               | 461.98 (122.04)                              | 576.15 (152.20)                              |