



Mirafi® MPG⁴ Composite Paving Grid

TenCate Geosynthetics develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

Mirafi® MPG⁴ is a composite paving interlayer comprised of a lightweight polypropylene paving fabric reinforced with continuous filament fiberglass, mechanically fastened in the machine, cross and bias angle directions. This unique, patent pending paving interlayer is designed for highly distressed pavement conditions and in addition, the material will provide a moisture barrier against further moisture intrusion. The lightweight polypropylene fabric requires less asphalt tack, saving on installation costs without compromising performance.

The Difference Mirafi® MPG⁴ Paving Composite Makes:

- **Reinforcement:** Mirafi® MPG⁴ adds pavement reinforcement by improving the fatigue resistance of the new overlay to traffic loads and delaying reflective cracking by utilizing the multi-directional design of the grid.
- **Material Design:** Mirafi® MPG⁴ by its unique design is the first multi-directional composite paving grid offering 360° reinforcement to distressed pavements in all directions.


- **Recyclability:** Mirafi® MPG⁴ can be milled and recycled into hot mix asphalt and reused saving on disposal costs lessening construction costs.
- **Installation:** Mirafi® MPG⁴ installs easily using standard paving fabric equipment. The unique mechanically bonded structure provides optimum performance while providing a product that is less prone to wrinkling than other interlayers in this category.
- **Rehealing:** The installed Mirafi® MPG⁴ produces a saturated interlayer that promotes rehealing, which allows for moving asphalt at intersections, which reduces the likelihood of delamination.
- **Traffic Improvement:** The multidirectional grid reinforcement improves the fatigue life of the overlay, to allow it to carry more traffic. Useful in applications where you have to maintain the curb reveal, but you need to increase the structural capacity. Equivalent to 2-3" of HMA.

APPLICATIONS

Mirafi® MPG⁴ is specifically designed to be used in hot mix asphalt overlays over existing, distressed asphalt or jointed concrete pavements, or in new construction applications.

Mirafi® MPG⁴ paving composite is ideal for:

- Highways
- Urban Streets
- Airports

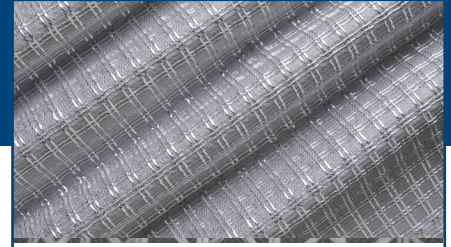


Mirafi® MPG⁴ Composite Paving Grid

- Bridge Decks
- Parking Lots and Shopping Centers

It is recommended to use TenCate Geosynthetics Installation Guidelines when installing Mirafi® MPG⁴.

Mirafi® MPG⁴ composite paving grid is one of the easiest interlayers to install. The unique mechanically bonded structure of the MPG4 delivers a product that is more forgiving than other products, and therefore produces significantly less wrinkles during construction, especially in curves or bends.

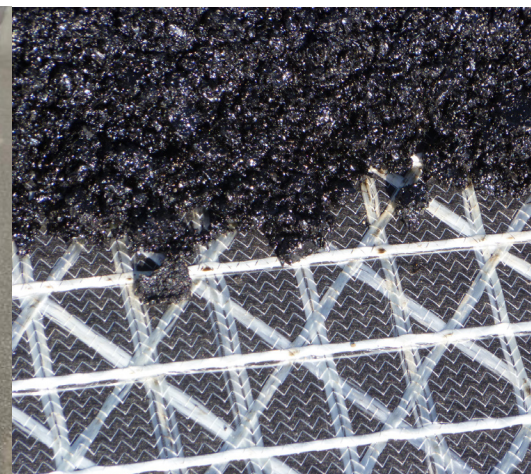

Mirafi® MPG⁴ Composite Paving Grid

Technical Data

Mechanical Properties	Test Method	Unit	Average Roll Value
Tensile Strength @ 0°			459 (80)
Tensile Strength @ 90°	ASTM D6637	lbs/in	459 (80)
Tensile Strength @ 45°	Method A	(kN/m)	459 (80)
Tensile Strength @ -45°	Modified		459 (80)
Tensile Elongation		%	< 3
Mass/Unit Area	ASTM D5261	oz/yd ² (g/m ²)	16.6 (563)
Melting point	ASTM D276	F° (C°)	Minimum Test Value Glass filaments are incombustible and temperature resistant up to 1472° (800°)
Asphalt Retention	ASTM D6140	gal/yd ² (l/m ²) %	0.17 (0.8)
Glass by weight		%	85

Physical Properties	Unit	Roll Characteristics	
Roll Dimensions (width x length)	ft (m)	6.25 x 300 (1.9 x 94.1)	12.5 x 150 (3.8 x 45.7)
Roll Area	yd ² (m ²)	208 (174)	
Estimated Roll Weight	lbs (kg)	245 (111)	

TenCate Geosynthetics Americas does not assume liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, statutory standards, warranties, guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation

© 2016 Nicolon Corporation. All Rights Reserved.

PDS.PGMG4 0719

365 South Holland Drive Tel +1 706 693 2226
Pendergrass, GA 30567 www.tencategeo.us

