

PERFORMANCE SUMMARY

MWS-LINEAR 2.0


Application: Stand Alone Stormwater Treatment Best Management Practice

Type of Treatment: High Flow Rate Media Filtration and Biofiltration (dual-stage)

DESCRIPTION

Modular Wetland System Linear 2.0 (MWS-L 2.0) is an advanced dual-stage high flow rate media and biofiltration system for the treatment of urban stormwater runoff. Superior pollutant removal efficiencies are achieved by treating runoff through a pre-treatment chamber containing a screening device for trash and larger debris, a separation chamber for larger TSS and a series of media filter cartridges for removal of fine TSS and other particulate pollutants. Pre-treated runoff is transferred to the biofiltration chamber which contains an engineered ion exchange media designed to support an abundant plant and microbe community that captures, absorbs, transforms and uptakes pollutants through an array of physical, chemical, and biological mechanisms.

MWS-L 2.0 is a self-contained treatment train that is supplied to the job site completely assembled and ready for use. Once installed, stormwater runoff drains directly from impervious surfaces through an built-in curb inlet, drop in, or via pipe from upstream inlets or downspouts. Treated runoff is discharged from the system through an orifice control riser to assure the proper amount of flow is treated. The treated water leaving the system is connected to the storm drain system, infiltration basins, or to be re-used on site for irrigation or other uses.

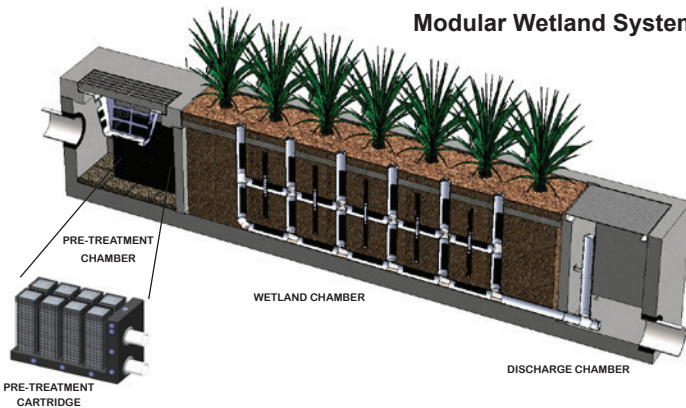

Modular Wetland System Linear 2.0 (MWS-L 2.0) has been independently tested in laboratory and field conditions since 2008.

Oceanside Test Site



Portland Test Site



HEAVY METALS: Copper / Zinc

TOTAL SUSPENDED SOLIDS:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	.76 / .95	.06 / .19	92% / 80%	Majority Dissolved Fraction
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	.04 / .24	< .02 / < .05	>50% / >79%	Effluent Concentrations Below Detectable Limits
Recycling Facility, Kileen, TX / CERL - 2011-2012	Field	.058 / .425	.032 / .061	44% / 86%	Test Unit 2
TAPE Field Testing / Portland, OR 2011/2012	Field	.017 / .120	.009 / .038	50% / 69%	Total Metals

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	270	3	99%	Sil-co-sil 106 - 20 micron mean particle size
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	45.67	8.24	82%	Mean Particle Size by Count < 8 Microns
Recycling Facility, Kileen, TX / CERL - 2011-2012	Field	676	39	94%	Test Unit 2
TAPE Field Testing / Portland, OR 2011/2012	Field	75.0	15.7	85%	Means particle size of 8 microns

Modular Wetland System, Inc.
2972 San Luis Rey Rd
Oceanside, CA 92058



www.modularwetlands.com
P 760-433-7640
F 760-433-3179

PERFORMANCE SUMMARY

MWS-LINEAR 2.0

PHOSPHORUS:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
TAPE Field Testing / Portland, OR 2011/2012	Field	.227	.074	64%	TOTAL P
TAPE Field Testing / Portland, OR 2011/2012	Field	.093	.031	67%	ORTHO P

BACTERIA:

Description	Type	Avg. Influent (MPN)	Avg. Effluent (MPN)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	1600 / 1600	535 / 637	67% / 60%	Fecal / E. Coli
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	31666 / 6280	8667 / 1058	73% / 83%	Fecal / E. Coli

LEAD:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	.54	.10	82%	Total
Recycling Facility, Kileen, TX / CERL - 2011-2012	Field	.01 / .043	.004 / .014	60% / 68%	Both Test Units
TAPE Field Testing / Portland, OR 2011/2012	Field	.011	.003	70%	Total

All removal efficiencies and concentrations rounded up for easy viewing. Please call us for more information, including full copies of the reports reference above.

NITROGEN:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	.85	.21	75%	NITRATE
TAPE Field Testing / Portland, OR 2011/2012	Field	1.40	0.77	45%	TKN

HYDROCARBONS:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	10	1.625	84%	Oils & Grease
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	.83	0	100%	TPH Motor Oil
TAPE Field Testing / Portland, OR 2011/2012	Field	24.157	1.133	95%	Motor Oil

TURBIDITY:

Description	Type	Avg. Influent (NTU)	Avg. Effluent (NTU)	Removal Efficiency	Notes
Waves Environmental - 1/4 Scale Lab Testing - 2007	Lab	21	1.575	93%	Field Measurement
City of Oceanside Boat Wash / Waves Environmental - 2008	Field	21	6	71%	Field Measurement

COD:

Description	Type	Avg. Influent (mg/L)	Avg. Effluent (mg/L)	Removal Efficiency	Notes
Recycling Facility, Kileen, TX / CERL - 2011-2012	Field	516 / 1450	90 / 356	83% / 75%	Both Test Units